

very resistant

3,680 lbs.

23,360 psi.

1.04g/cm3



**lpé** is a hardwood from South America and undoubtedly the number one option for decking.

Known to last for 50 years, **lpé** is extremely weather resistant, significantly harder, has superior bending strength, and has superb resistance to insects and decay.

When oiled and maintained, its natural gorgeous golden brown colour can darken to a deep reddish mahogany colour. **Ipé** can also be left to sun exposure without losing structural integrity and will gradually fade leaving a silvery grey patina.

#### cumaru

DURABILITY

JANKA HARDNESS

BENDING STRENGTH

DENSITY

very durable

3,340 lbs.

22,400 psi.

1.07 g/cm3



**Cumaru** has very similar characteristics to Ipé offering one of the best options in exotic wood decking.

Generally speaking, **Cumaru** is lighter in colour than lpé and varies from yellow-brown to reddish brown, and with a grain that is more flamed. Similar to lpé,

**Cumaru** can last 50 years with its superb durability and weathering properties, as well as resistance to termites and other dry-wood borers.

Unlike other exotic species, **Cumaru** does not emit tannin which tend to produce stains near swimming pools.

### garapa

URABILITY

JANKA HARDNESS

BENDING STRENGTH

SENSITY

high density

1,630 lbs.

12,900 psi.

.79 g/cm3.



Garapa is an exotic hardwood that is naturally resistant to rot, decay and insect attack. Similar to Ipé and Cumaru, Garapa is naturally scratch resistant which allows the surface to remain smooth for many years, making Garapa a perfect wood for exterior decking.

When a lighter colour is preferred, **Garapa**'s light golden honey colour

is iridescent when cut and matures to a rich brownish colour over time making it a great alternative to Ipé or Cumaru.

**Garapa** offers a 30 year lifespan with very low maintenance and is offered at a lower price point than lpé and Cumaru.



## PREMIUM DECKING SOLUTIONS

These clips are the most affordable and easy to use fasteners for any decking.



Air-Dried Lumber & Composites

### **EXTREMES**

Gap Spacing 5/32" (4 mm)



Air-Dried, Kiln-Dried Lumber & Composites

#### **EXTREMEK**D

Gap Spacing 1/4" (6,4 mm)



Kiln-Dried Lumber, Composites & PVC


DC GOODFELLOW



Finish your premium hardwood decking with Ipé Oil to preserve its natural beauty and color. Apply approximately once per year, or up to twice a year if exposed to continuous direct sunlight.

# GROOVED DECKING R3mm R3mm 1' 1' 5½' 5½' F3½' F3½' F3mm R3mm R3mm R3mm R3mm R3mm R3mm

Decking profiles available in 8' to 16' grooved or solid lengths.

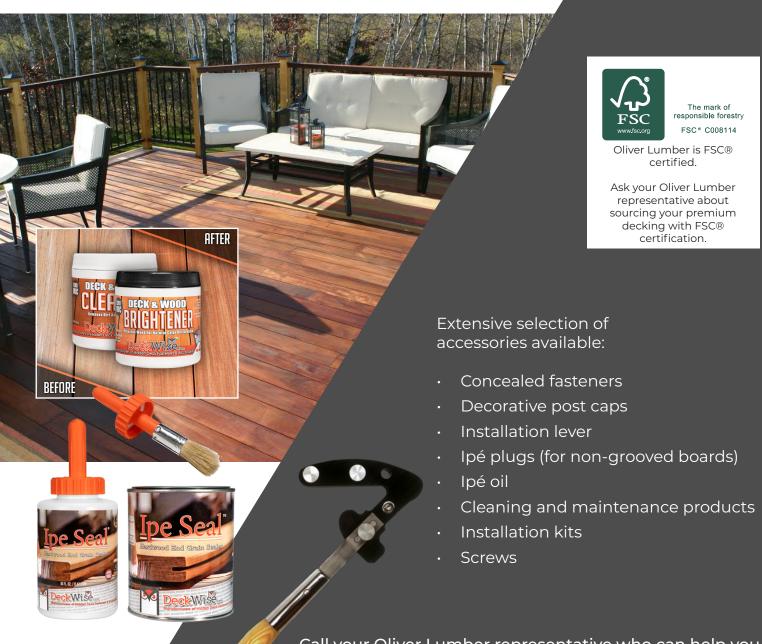

Call your Oliver Lumber representative who can help you make the right choice for your unique decking project.



oliverlumber.com

800-268-2471

